




it's dense.


Top-Track® High-Density Storage

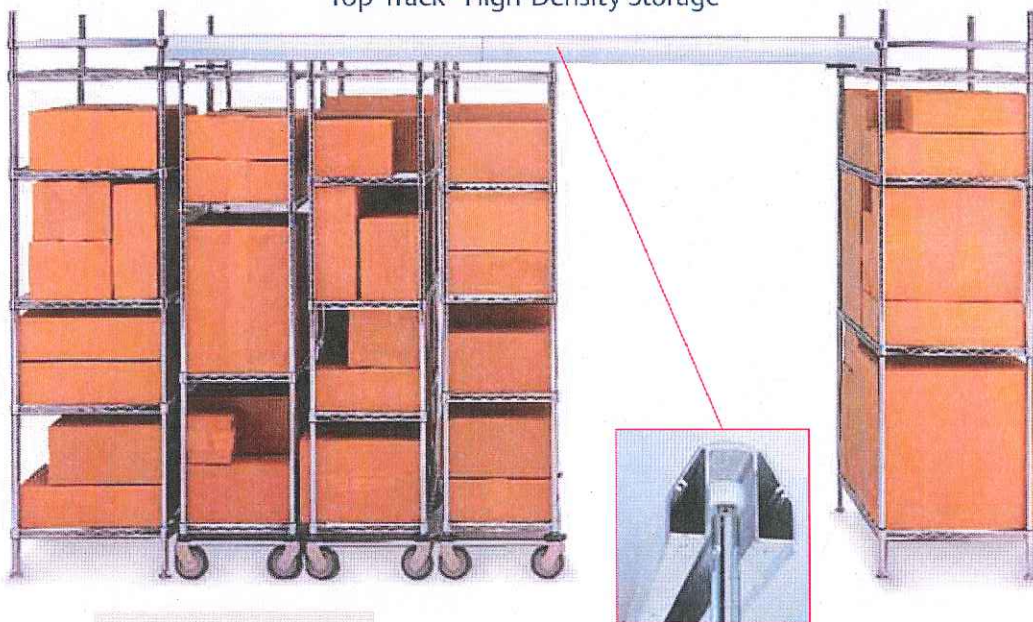

ADA Compliant



TRADITIONAL STORAGE USES UP TO 20' OF SPACE

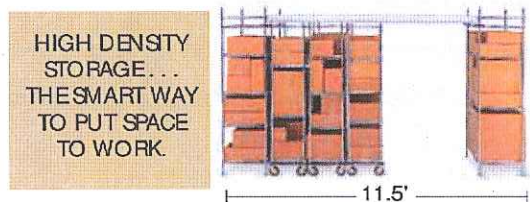

HIGH DENSITY STORAGE... THE SMART WAY TO PUT SPACE TO WORK.

11.5'

Top-Track key facts

The guide track is positioned above the shelving system.

- Floors are easy to clean.
- Utility carts can easily be rolled into and out of the active aisle.
- The guide track compensates for uneven floor surfaces and keeps units in alignment.
- Mobile units are designed to address medium-duty applications. The weight capacity of a Top-Track mobile unit is 900 lb. (410kg).

Choose the shelving type based on your application.

Top-Track (single deep) can be used with Metro wire shelving (Super Erecta or Super Adjustable Super Erecta) and polymer shelving systems (MetroMax i and MetroMax Q).

Double-Deep configurations can be created when two systems are joined together to increase the overall depth of the storage system for even greater storage capacity. Double-Deep Top-Track is only available for Super Erecta and Super Adjustable Super Erecta style shelving.

SUPER ERECTA®, SUPER ERECTA PRO™ AND SUPER ADJUSTABLE TOP-TRACK®




Wire Shelving — Super Erecta®, Super Erecta Pro™ and Super Adjustable Top-Track — 11.12




Super Erecta® Top-Track®

FRONT VIEW



- A = Stationary End Units
- B = Stationary Intermediate Unit (Optional)
- C = Track Set
- D = Mobile Units
- E = Open Aisle

OVERHEAD VIEW



Stationary End Unit Kits

Includes hardware necessary for connecting stationary end units to track. One kit is required per single system. 86" (2185mm) posts are included. Shelves sold separately — See pages 34, 37 and 42.

| Shelf Width (in.) | Shelf Width (mm) | Approx. Pkd. Wt. (lbs.) | Approx. Pkd. Wt. (kg) | Cat. No. Chrome-Plated | List Price Each | Cat. No. Metrosseal 3 with Microban® | List Price Each | Cat. No. Stainless Steel | List Price Each |
|-------------------|------------------|-------------------------|-----------------------|------------------------|-----------------|--------------------------------------|-----------------|--------------------------|-----------------|
| 18 | 457 | 11 | 4.9 | TTE18C | 618.00 | TTE18K3 | 642.00 | TTE18S | 1,044.00 |
| 21 | 530 | 11.5 | 5.1 | TTE21C | 629.00 | TTE21K3 | 653.00 | TTE21S | 1,057.00 |
| 24 | 610 | 12 | 5.4 | TTE24C | 640.00 | TTE24K3 | 664.00 | TTE24S | 1,071.00 |

Stationary Intermediate Unit Kits

Includes hardware necessary for connecting intermediate unit to track on both sides. 86" (2185mm) posts are included. Shelves sold separately — See pages 34, 37 and 42.

| Shelf Width (in.) | Shelf Width (mm) | Approx. Pkd. Wt. (lbs.) | Approx. Pkd. Wt. (kg) | Cat. No. Chrome-Plated | List Price Each | Cat. No. Metrosseal 3 with Microban® | List Price Each | Cat. No. Stainless Steel | List Price Each |
|-------------------|------------------|-------------------------|-----------------------|------------------------|-----------------|--------------------------------------|-----------------|--------------------------|-----------------|
| 18 | 457 | 7.5 | 3.3 | TTA18C | 366.00 | TTA18K3 | 378.00 | TTA18S | 580.00 |
| 21 | 530 | 8 | 3.6 | TTA21C | 375.00 | TTA21K3 | 387.00 | TTA21S | 591.00 |
| 24 | 610 | 8.5 | 3.8 | TTA24C | 384.00 | TTA24K3 | 396.00 | TTA24S | 603.00 |

Track Sets

Includes necessary sections of track for assembling track runs up to 21' (6400mm).

| Length (feet) | Length (mm) | Approx. Pkd. Wt. (lbs.) | Approx. Pkd. Wt. (kg) | Cat. No. | List Price Each | Length (feet) | Length (mm) | Approx. Pkd. Wt. (lbs.) | Approx. Pkd. Wt. (kg) | Cat. No. | List Price Each |
|---------------|-------------|-------------------------|-----------------------|----------|-----------------|---------------|-------------|-------------------------|-----------------------|----------|-----------------|
| 2 1/2 | 762 | 15 | 6.8 | TTS2.5NA | 399.00 | 14 | 4267 | 98 | 44.1 | TTS14NA | 1,091.00 |
| 6 | 1828 | 40.5 | 18.2 | TTS6NA | 427.50 | 15 | 4572 | 106.5 | 47.9 | TTS15NA | 1,322.50 |
| 7 | 2135 | 47.5 | 21.3 | TTS7NA | 486.00 | 16 | 4877 | 113.5 | 51 | TTS16NA | 1,384.50 |
| 8 | 2440 | 56 | 25.2 | TTS8NA | 717.50 | 17 | 5182 | 121 | 54.4 | TTS17NA | 1,451.00 |
| 9 | 2743 | 62.5 | 28.1 | TTS9NA | 778.00 | 18 | 5486 | 128 | 51.6 | TTS18NA | 1,513.00 |
| 10 | 3048 | 69.5 | 31.2 | TTS10NA | 841.50 | 19 | 5791 | 135 | 60.7 | TTS19NA | 1,572.00 |
| 11 | 3353 | 76.5 | 34.4 | TTS11NA | 906.50 | 20 | 6096 | 142 | 63.9 | TTS20NA | 1,635.00 |
| 12 | 3657 | 83.5 | 37.5 | TTS12NA | 968.00 | 21 | 6400 | 149 | 67 | TTS21NA | 1,695.00 |
| 13 | 3962 | 92 | 41.4 | TTS13NA | 1,030.00 | | | | | | |

Note: TTS2.5NA includes a joining kit to connect the track to other track sets.

Mobile Unit Kits (shelves sold separately — see pages 34, 37 and 42)

One kit required per mobile unit. Kit includes posts, casters/caster channels, donut bumpers, and roller bearing assemblies.

| Shelf Width (in.) | Shelf Width (mm) | Overall Width (in.) | Overall Width (mm) | Approx. Pkd. Wt. (lbs.) | Approx. Pkd. Wt. (kg) | Cat. No. Chrome-Plated | List Price Each | Cat. No. Metrosseal 3 with Microban® | List Price Each | Cat. No. Stainless Steel | List Price Each |
|-------------------|------------------|---------------------|--------------------|-------------------------|-----------------------|------------------------|-----------------|--------------------------------------|-----------------|--------------------------|-----------------|
| 18 | 457 | 20 1/4 | 514 | 32 | 14.4 | TTM18C | 396.00 | TTM18K3 | 689.00 | TTM18S | 884.00 |
| 21 | 530 | 23 1/4 | 590 | 33 | 14.8 | TTM21C | 408.00 | TTM21K3 | 699.00 | TTM21S | 896.00 |
| 24 | 610 | 26 1/4 | 667 | 34 | 15.3 | TTM24C | 420.00 | TTM24K3 | 711.00 | TTM24S | 908.00 |

Notes:

1. Each stationary end and intermediate unit must have a minimum of four shelves. For all Super Adjustable applications, the top and bottom shelves must be non "quick adjust" Super Erecta shelves.
2. The standard Deep Top-Track system requires the use of 86" (2185mm) posts (i.e. 86P, 86PK, or 86PS) on the stationary end and intermediate units. Shelves for the stationary end and intermediate units are sold separately.
3. The mobile unit kit include special 74" (1880mm) posts with casters. Shelves for mobile units are sold separately.
4. Recommended maximum load rating for a mobile unit is 900 lbs. (410kg). Floor should be level, smooth, and free from large cracks and raised obstacles.
5. Under normal conditions, an aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).
6. A stationary intermediate unit is required when track length exceeds 21 feet (6400mm). A stationary intermediate unit may be used at the discretion of the user when track lengths are less than 21 feet (6400mm).
7. To accommodate bumpers, the actual size of a mobile unit is 2.5" (63.5mm) wider than the shelf width shown. For example, an 18" (457mm) wide unit is actually 20.5" (521mm).
8. To calculate the overall length of a Super Erecta Top Track System, add the following: Nominal track length + Nominal widths of each end unit + 1.5" (38mm).

Indicates antimicrobial product.