

# RICHIE RICH

B-69, GANDHI NAGAR, MORADABAD-244001 (U.P.) • MOB. : 98970-46969, 99270-69694

Ref No. 307/RW/2019-20

Dated \_\_\_\_\_

To,  
Mr. Ankur agarwal,  
Station road,  
Moradabad.  
Dear Sir,

## We also deal in :

- Rain Water Harvesting
- Compact E.T.P. System
- Compact W.W.T.P. System
- Membrane Bio Reactors
- Swimming Pools
- Fire Extinguishers (ISI)
- Fixed Fire Fighting Installation
- Gas Flooding Station
- Fire Detection Alarm
- Epoxy Coating (Acid/Alkali Proof)
- Rubber Lining
- Fabrication of S.S./M.S. Structure of Any Kind
- AMC of Water Treatment/Chilling Plant
- Industrial R.O./D.M./Softener/Filter Plant
- Water Treatment Chemicals
- Civil Work on Contract Basic

Subject :-

Rain Water Harvesting Turnkey job


This has reference to the discussion held with you of undersigned for Rain Water Harvesting turnkey job at Meerut. As per the size of structure & area to be covered we are enclosing here with our detailed offer of Rain Water harvester, complete with construction of storage tank, plant, external piping network & accessories as per the following schedule.

Annexure I	Civil Engineering Part
Annexure II	Rain Water Harvesting Plant
Annexure III	External Piping Network
Annexure IV	Summary of Cost
Annexure V	General Terms & Conditions.

We believe, the above is in line with your requirement. Should you need any information or clarification, please feel free to contact us.

Thanking you and assuring you of our best service and prompt action at all times.

Yours faithfully,  
for RICHIE RICH

  
(Sharad Gupta)

# RICHIE RICH

B-69, GANDHI NAGAR, MORADABAD-244001 (U.P.) • MOB. : 98970-46969, 99270-69694

Ref No. 307/RW/2019-20

ANNEXURE-I  
CIVIL ENGINEERING PART

Dated \_\_\_\_\_

## We also deal in :

	S.NO.	PARTICULARS	QTY.	AMOUNT
• Rain Water Harvesting	1.	SETTLING TANK (rupees fifty five thousand two hundred only)	1 job	55,200=00
• Compact E.T.P. System		Construction of SETTLING Tank of 5 feet X 8 feet X 7 feet depth ( external Dimensions) complete with lean concrete at bottom, load bearing 9" thick wall with 1/2" thick duly plastered internally, top RCC slab of 5" thick concrete and reinforcement done by 10 mm MS tor bars,with the provision of 1 No. reinforced pre casted manhole cover size 18" X 18".		
• Compact W.W.T.P. System				
• Membrane Bio Reactors				
• Swimming Pools				
• Fire Extinguishers (ISI)		PLEASE NOTE i) The prices are given for excavation of tank in soft soil, if the land is rocky the excavation job shall be carried out by the owner and we will bear only Rs. 1/Cft. and rest of the amount shall be born by the owner and time of completion would be prolong in that case.		
• Fixed Fire Fighting Installation				
• Gas Flooding Station				
• Fire Detection Alarm		ii) Water and electricity shall be provided by the owner free of cost during the job.		
• Epoxy Coating (Acid/Alkali Proof)				
• Rubber Lining				
• Fabrication of S.S./M.S. Structure of Any Kind		for RICHIE RICH		
• AMC of Water Treatment/Chilling Plant				
• Industrial R.O./D.M./Softener/Filter Plant				
• Water Treatment Chemicals				
• Civil Work on Contract Basic				

# RICHIE RICH

B-69, GANDHI NAGAR, MORADABAD-244001 (U.P.) • MOB. : 98970-46969, 99270-69694

Ref No. 307/R-2/2019-20

Dated \_\_\_\_\_

## ANNEXURE-II

### RAIN WATER HARVESTING PLANT

#### We also deal in :

S.NO.	PARTICULARS	QTY.	AMOUNT.
1-	SUPPLY OF RAIN WATER HARVESTING PLANT OF 14 M3/Hr CAPACITY ON THE BASIS OF REQUIRMENT AS PER THE FOLLOWING SCHEDULE :-	1 UNIT	Rs. 86,400=00
	(Rupees eighty six thousand four hundred only)		
1)	PRESSURE SAND FILTER Pressure sand filter having capacity of 15,000 litres/hr. complete with F.R.P. pressure vessel, frontal heavy duty P.V.C. pipe line and fitting operating single top mounted multiport valve with complete charge of filter media, distribution and collection system and pressure gauge. 1 No		
ii)	RECIRCULATION PUMP Recirculation pump set, Horizontal submersible type of Kirloskar/CRI/V Guard/Crompton having capacity of 250 Litre/Minute against the total head of 16 meter, operated with single phase, 220 volts, 50 C/S power supply, complete with cabling from pump to panel. 1 No.		
iii)	ELECTRICAL CONTROL PANEL Electrical control panel wall mounted type fabricated from 20 SWG thick CRCA sheet complete with metering, along with protection device i.e. MCB, thermal overload relay, etc. 1 No.		
iv)	FLOW METER Analoge type, pointer based, flow quantity check meter, of suitable diameter for measuring the quantity filtered through.		
2.	ERECTION & COMMISSIONING Erection and commissioning charges for the above quoted equipments. 1 JOB. L.S. Rs. 6,000=00 (Rupees six Thousand only)		
	PLEASE NOTE :-		
i)	filter keeping area of required size shall be provided by the owner near the bore well.		
ii)	Drain line from drain port to outside drain shall be provided by the owner.		
iii)	All consumables shall be provided by the owner during the commissioning of the plant.		

for RICHIE RICH

# RICHIE RICH

B-69, GANDHI NAGAR, MORADABAD-244001 (U.P.) • MOB. : 98970-46969, 99270-69694

Ref No. 307/RW/2019-20

ANNEXURE -III  
 EXTERNAL PIPING

Dated \_\_\_\_\_

**We also deal in :**

S.NO.	PARTICULAR	QTY.	AMOUNT
	EXTERNAL PIPING & VALVES FOR RAIN WATER HARVESTING AS PER THE FOLLOWING SCHEDULE :-		
A)	SUPPLY OF PVC PIPELINE	1 LOT.	Rs. 11,400=00
	(Rupees eleven Thousand four hundred only)		
1-	PIPING		
1.1	MAIN DRAIN LINE Main drain line from DRAIN to Sump 4", PVC, 6 Kg pressure. maximum length 10', as calculated.		
1.2	FILTERED WATER CARRYING LINE Filtered water carrying line from pump to Filter to Flow meter to borewell.		
1.3	TANK DISCHARGE LINE Discharge Overflow line of the tank to drain PVC, 4" dia, 6kg pressure. Maximum length 10', as calculated.		
2.	BOREWELL		
2.1	BOREWELL OF 4" Dia, at least 20 feet deep from water level .		
B)	LAYING AND INSTALLATION Laying and installation charges for the above		
quoted piping			
1Job	L.S.		Rs. 1,800=00
	(Rupees ONE Thousand eight HUNDRED only)		
	PLEASE NOTE : Rain water filling line alongwith regulating valve from main source to collecting tank shall be provided by the owner		
for RICHIE RICH			
Water Treatment Chemicals			
Civil Work on Contract Basic			

# RICHIE RICH

B-69, GANDHI NAGAR, MORADABAD-244001 (U.P.) • MOB. : 98970-46969, 99270-69694

Ref No. 307/RW/2019-20

ANNEXURE -IV  
SUMMARY OF PRICES

Dated \_\_\_\_\_

### We also deal in :

- Rain Water Harvesting
- Compact E.T.P. System
- Compact W.W.T.P. System
- Membrane Bio Reactors
- Swimming Pools
- Fire Extinguishers (ISI)
- Fixed Fire Fighting Installation
- Gas Flooding Station
- Fire Detection Alarm
- Epoxy Coating (Acid/Alkali Proof)
- Rubber Lining
- Fabrication of S.S./M.S. Structure of Any Kind
- AMC of Water Treatment/Chilling Plant
- Industrial R.O./D.M./Softener/Filter Plant
- Water Treatment Chemicals
- Civil Work on Contract Basic

S.NO. PARTICULARS.

S.NO.	PARTICULARS.	AMOUNT
1.	ANNEXURE-I CIVIL ENGINEERING PART	Rs. 55,200=00
2.	ANNEXURE-II RAIN WATER HARVESTING PLANT.	Rs. 92,400=00
3.	ANNEXURE-III EXTERNAL PIPING.	Rs. 13,200=00
TOTAL FOR RAIN WATER HARVESTING PLANT OF 14,000 Ltr/Hr (Rupees One lakh thirty four thousand only)		Rs. 1,60,800=00
		+ GST 18 %
<b>TOTAL AMOUNT 1,60,800/- + 28,944/- = 1,89,744/-</b>		

PLEASE NOTE :-

- Prices quoted are F.O.R.
- Electrical cabling of 2.5mm<sup>2</sup>/ 3 core copper from main panel to our electrical control panel is to be provided by the owner at his own cost.
- Construction of plant room, and any other structure are not in our scope of work and these shall be carried out by the owner at his own simultaneously.

for RICHIE RICH

Tin No. 09459202064 Dt.15-01-2005  
C.T.T. No. MX-5020329 Dt. 15-02-2005  
Service Tax No. AII PG 1786B STR 001  
Pan No. AII PG 1786B

E-mail : watfire@in.com,  
watfire@rediffmail.com,  
watfire@live.in,  
watfire@aol.in

# RICHIE RICH

B-69, GANDHI NAGAR, MORADABAD-244001 (U.P.) • MOB. : 98970-46969, 99270-69694

Ref. No. 307/RW/2019-20

Dated \_\_\_\_\_

## ANNEXURE-V GENERAL TERMS & CONDITIONS

### We also deal in :

- Rain Water Harvesting
  - Compact E.T.P. System
  - Compact W.W.T.P. System
  - Membrane Bio Reactors
  - Swimming Pools
  - Fire Extinguishers (ISI)
  - Fixed Fire Fighting Installation
  - Gas Flooding Station
  - Fire Detection Alarm
  - Epoxy Coating (Acid/Alkali Proof)
  - Rubber Lining
  - Fabrication of S.S./M.S. Structure of Any Kind
  - AMC of Water Treatment/Chilling Plant
  - Industrial R.O./D.M./Softener/Filter Plant
  - Water Treatment Chemicals
  - Civil Work on Contract Basic
- 1- COMPLETION  
Construction of Settling Tank shall be completed within 2-3 weeks and finishing (If allotted) e.g. re-filling of sides, ramming, external piping, fixing of tank fittings, installation and testing of rainwater filtration plant shall be done in another 1 week, provided all decisions payments would be clear within a reasonable time frame.
  - 2- SALES TAX  
GST of 18% is to be charged extra,
  - TERMS OF PAYMENTS
    - i) 35% Advance alongwith confirmed order.
    - ii) 25% After excavation of Main settling tank, ramming, of excavated soil, lean concreting and building laying of raft and shuttering over the brick wall.
    - iii) 25% After despatch of external piping channel and for the despatch of the filtration plant
    - iv) 10% After installation of filtration plant.
    - v) 5% After commissioning of complete plant or within 2 weeks of installation of plant whichever earlier.
  - 6- VALIDITY  
The offer is valid for 30 days.
  - 7- GENERAL
    - i) All items are quoted herewith as per our specifications given herein, as any alteration you required in the same shall be in-corporated subject to cost revision.
    - ii) We are free to change the scheme of piping network or that of any other items as per latest code without any prior notice to party.
    - iii) Bills produced to the party for the payment should be closed within stipulated time otherwise 24% per annum interest will be charged on the billing amount and completion time is liable to prolong in that case.
    - iv) Water and electricity shall be provided by the owner free of cost.

for RICHIE RICH

Electric Panel with  
Flow Totalizer to measure  
Quantum of Recharge

RAINSOURCE™

Multi - port Valve

2 inch Dia PVC pipe (10 Kg Pressure)

G.L.

New Recharge Bore  
(to be made as per  
design specifications)

WATER BEING DISCHARGED  
UNDER PRESSURE

Inflow of Rainwater  
Run off from building

Overflow Pipe

SUBMERSIBLE WATER PUMP

Rainwater Collection Sump

Blind Pipe

Slotted Pipe

Bore Below Ground Level


RAINSOURCE™  
PRESSURE RAINWATER HARVESTING SYSTEM

By :

**RICHE RICH**

6-49, Gandhi Nagar, Morichand (J.P.)  
MOB : 98279-25568 / 98279-48969

# 1 No. of RAINSOURCE™ System

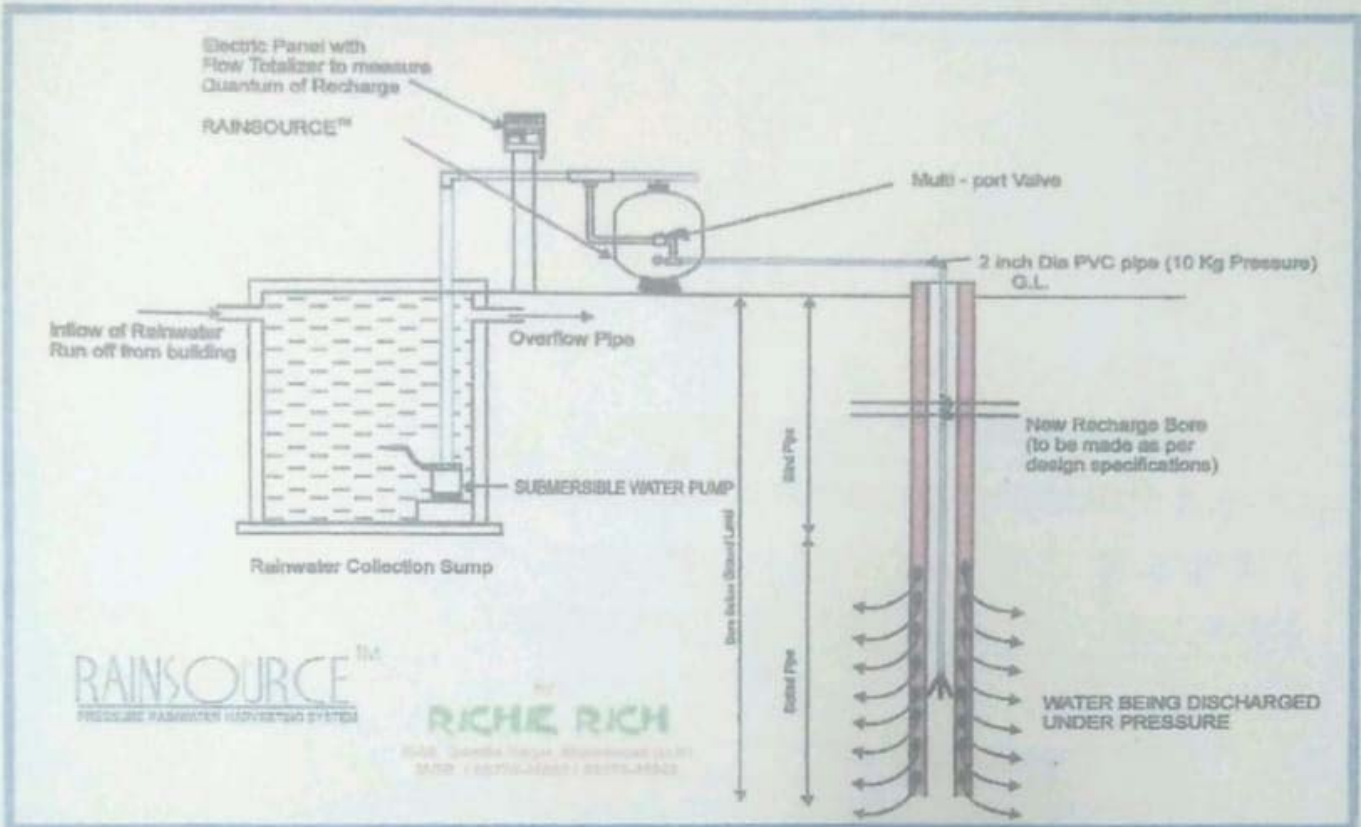

= (is equivalent to)

